Features

- Average Forward Current:$I_{F(AV)}$=5A
- Polarity: Color band denotes cathode

SMA
(DO-214AC)

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
SS52A~SS520A	SMA (DO-214AC)	SS5*	2000

*:From 2-20

Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Test Conditions	SS5								
				2	3	4	5	6	8	10	15	20
Repetitive Peak Reverse Voltage	V_{RRM}	V		20	30	40	50	60	80	100	150	200
MaximumRMS Voltage	V_{RMS}	V		14	21	28	35	42	56	70	105	140
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, FIG.1	5.0								
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave, 1 cycle, Ta=25℃	150								
Junction T emperature	T_J	℃		-55~+125				-55~+150				
Storage Temperature	T_{STG}	℃		-55 ~ +150								

Electrcal Charcteristics (Ta=25℃unless otherwise specified)

Item	Symbol	Unit	Test Condition		SS5								
					2	3	4	5	6	8	10	15	20
Peak Forward Voltage	V_F	V	I_F=5.0A		0.55			0.70		0.85		0.95	
Peak Reverse Current	I_{RRM1}	mA	$V_{RM}=V_{RRM}$	T_a=25℃	0.5					0.2			
	I_{RRM2}			T a =100℃	20					10			
Thermal Resistance(Typical)	$R_{\theta J-A}$	℃/W	Between junction and ambient		55								
	$R_{\theta J-L}$		Between junction and terminal		17								

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

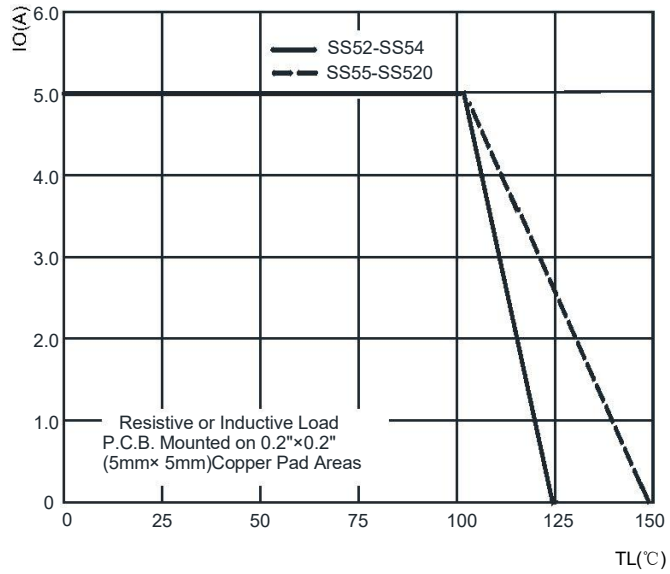

FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

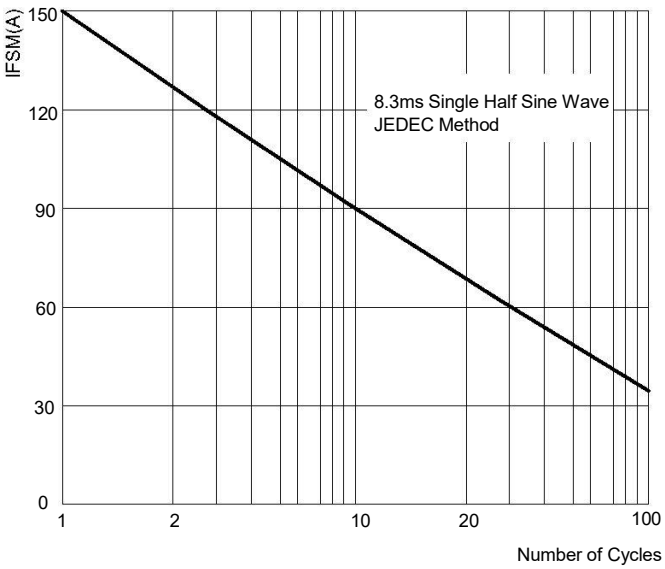

FIG.3: TYPICAL FORWARD CHARACTERISTICS

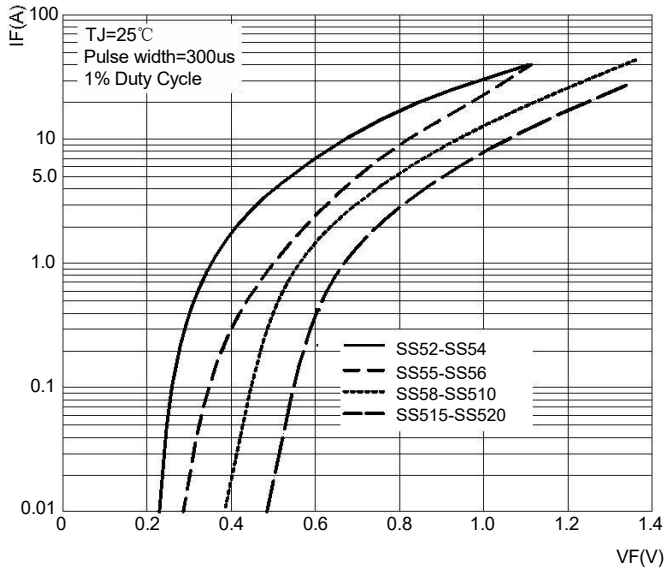

FIG.4: TYPICAL REVERSE CHARACTERISTICS

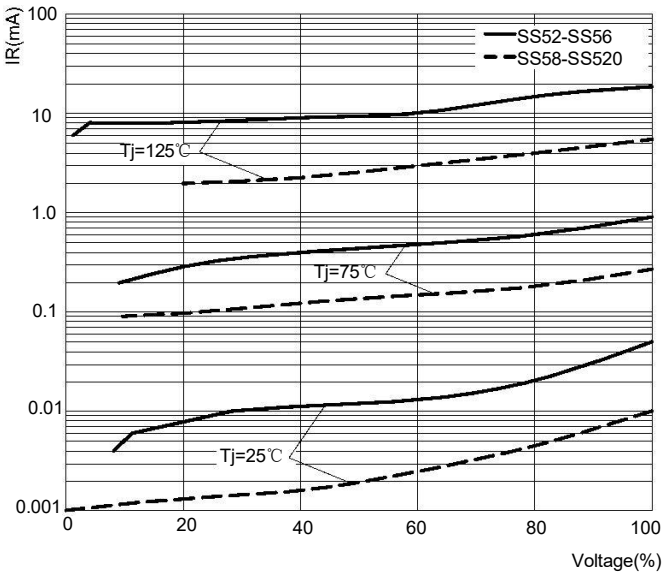

Package Outline Dimensions

SMA(DO-214AC)

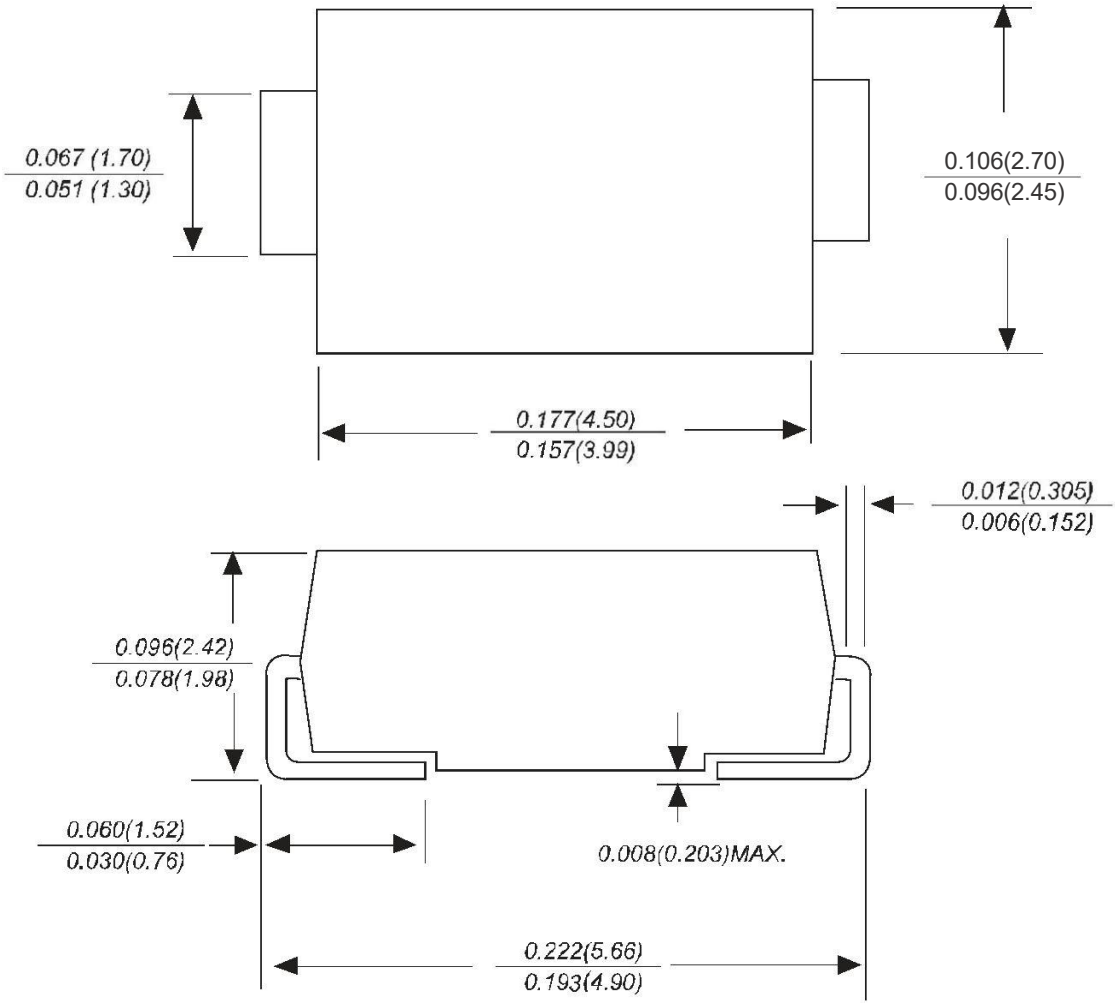

Dimensions in inches and (millimeters)

Attention

■ Any and all Anyi Semiconductor products described or contained herein do not have specifications that can handleapplications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applicationswhose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Anyi Semiconductor representative nearest you before using any Anyi Semiconductor products described or contained hereinin such applications.

■ Anyi Semiconductor assumes no responsibility for equipment failures that result from using products at values thatexceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in productsspecifications of any and all Anyi Semiconductor products described or contained herein.

■ Specifications of any and all Anyi Semiconductor products described or contained herein stipulate the performance,characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms andstates that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in thecustomer's products or equipment.

■ Anyi Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductorproducts fail with some probability. It is possible that these probabilistic failures couldgive rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measuresinclude but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all Anyi Semiconductor products(including technical data, services) described or contained hereinare controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining theexport license from the authorities concerned in accordance with the above law

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production.Anyi Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regardingits use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.When designing equipment, refer to the "Delivery Specification" for the Anyi Semiconductor product that you intend to use.